

MV-CT*M/CU0120/G

12 MP USB 3.0 Area Scan Camera



GEN<i>i>CAM

USBTM
VISION

Introduction

Designed for industrial applications, MV-CT*M/CU0120/G camera offers industry-leading performance and reliability, with various versions to meet diverse application needs. It supports IP67 protection, expanded interfaces, and integration of liquid/electric lenses, light sources, and lens cap, creating a more flexible and efficient system.

Key Features

- The devices with PRO version and MAX version support waterproof connector.
- The devices with PRO version and MAX version adopt precision temperature control design for fast heat balance.
- The color devices with PRO version and MAX version support auto color correction based on multi-spectral fusion technology.
- The device with MAX version integrates lens and light source, enabling lens focusing and light source control.
- Adopts Type-C interface and supports higher transmission bandwidth.
- Compatible with USB3 Vision Protocol, GenICam Standard, and the third-party software based on the protocol and standard.


Applicable Industry

Electronic semiconductor, factory automation, food and beverage, medicine packaging, etc.


Available Models

- Mono camera (BASE):
MV-CT0MU0120/G/NN/NN
- Color camera (BASE):
MV-CT0CU0120/G/NN/NN

Sensor Quantum Efficiency

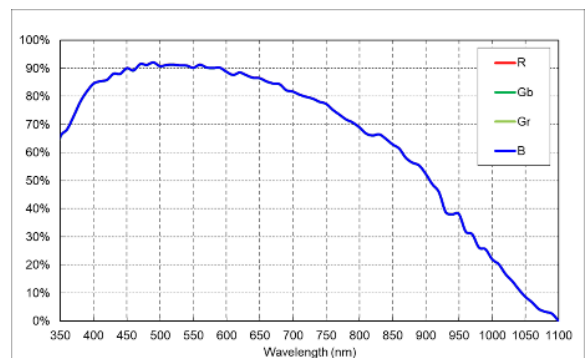

MV-CT*MU0120/G

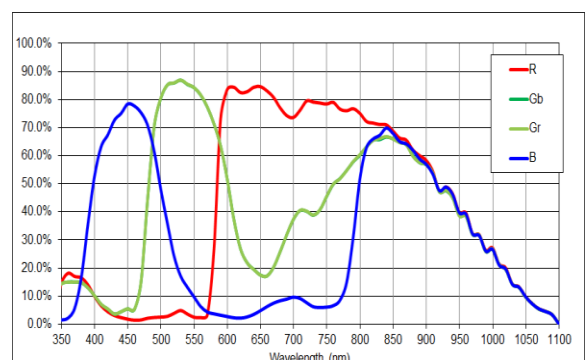

MV-CT*CU0120/G

Specification

Model	MV-CT*MU0120/G	MV-CT*CU0120/G
Performance		
Sensor type	CMOS, global shutter	
Sensor model	Stacked BSI	
Pixel size	3.45 μm \times 3.45 μm	
Sensor size	1.1"	
Resolution	4096 \times 3000	
Max. frame rate	31 fps @ 4096 \times 3000 Mono 8	31 fps @ 4096 \times 3000 Bayer GB 8
Dynamic range	67.4 dB	
SNR	43.9 dB	
Gain	0 dB to 12 dB	
Exposure time	20 μs to 10 sec	
Exposure mode	Off/Once/Continuous exposure mode, supports Trigger Width and Trigger Controlled	
Mono/color	Mono	Color
Pixel format	Mono 8/10/10Packed/12/12Packed	Mono 8, Bayer GB 8/10/10Packed/12/12Packed, YUV422Packed, YUV422_YUYV_Packed, RGB 8, BGR 8
Binning	Supports 1 \times 1, 2 \times 2, 4 \times 4	
Decimation	Supports 1 \times 1, 2 \times 2, 4 \times 4	
Reverse image	Supports horizontal and vertical reverse image output	
Electrical features		
Data interface	USB 3.0, compatible with USB 2.0	
Data interface type	Type-C interface	
Control interface	BASE: Not supported	
Digital I/O	8-pin M8 A-Code aviation connector provides power and I/O, including opto-isolated input \times 1 (Line 0), opto-isolated output \times 1 (Line 1), bi-directional non-isolated I/O \times 1 (Line 2).	
Power supply	9 VDC to 24 VDC, supports USB 3.0 power supply	
Power consumption	BASE: Typ. 1.9 W @ 5 VDC (USB 3.0 provides power supply)	BASE: Typ. 2 W @ 5 VDC (USB 3.0 provides power supply)
Mechanical		
Lens mount	C-mount	
Dimension	BASE: 29 mm \times 29 mm \times 30 mm (1.1" \times 1.1" \times 1.2")	
Weight	BASE: Approx. 72 g (0.2 lb.)	
Ingress protection	BASE: IP40 (under proper lens installation and wiring)	
Temperature	Working temperature: -30 $^{\circ}\text{C}$ to 60 $^{\circ}\text{C}$ (-22 $^{\circ}\text{F}$ to 140 $^{\circ}\text{F}$) Storage temperature: -30 $^{\circ}\text{C}$ to 80 $^{\circ}\text{C}$ (-22 $^{\circ}\text{F}$ to 176 $^{\circ}\text{F}$)	
Humidity	20% RH to 95% RH (no condensation)	
General		
Client software	MVS or third-party software meeting with USB3 Vision Protocol	
Operating system	32/64-bit Windows 7/10, 64-bit Windows 11, 32/64-bit Linux	
Compatibility	USB3 Vision, GenICam	
Certification	CE, RoHS, KC	

Dimension

BASE

