

MV-CT*M/CU0060/R

6 MP USB 3.0 Area Scan Camera



GEN*i*CAM

USBTM
VISION

Introduction

Designed for industrial applications, MV-CT*M/CU0060/R camera offers industry-leading performance and reliability, with various versions to meet diverse application needs. It supports IP67 protection, expanded interfaces, and integration of liquid/electric lenses, light sources, and lens cap, creating a more flexible and efficient system.

Key Feature

- The devices with PRO version and MAX version support waterproof connector.
- The devices with PRO version and MAX version adopt precision temperature control design for fast heat balance.
- The color devices with PRO version and MAX version support auto color correction based on multi-spectral fusion technology.
- The device with MAX version integrates lens and light source, enabling lens focusing and light source control.
- Adopts Type-C interface and supports higher transmission bandwidth.
- Compatible with USB3 Vision Protocol, GenlCam Standard, and the third-party software based on the protocol and standard.


Applicable Industry

Electronic semiconductor, factory automation, food and beverage, medicine packaging, etc.


Available Model

- Mono camera (BASE):
MV-CT0MU0060/R/NN/NN
- Color camera (BASE):
MV-CT0CU0060/R/NN/NN

Sensor Quantum Efficiency

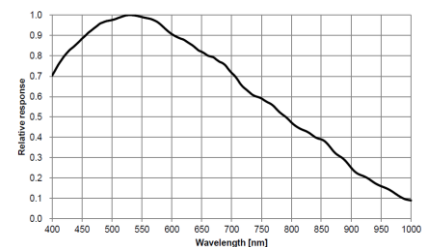

MV-CT*MU0060/R

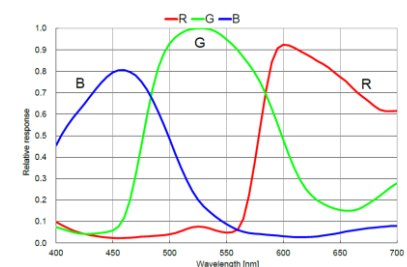

MV-CT*CU0060/R

Specification

Model	MV-CT*MU0060/R	MV-CT*CU0060/R
Performance		
Sensor type	CMOS, rolling shutter	
Sensor model	Sony IMX178	
Pixel size	2.4 μm × 2.4 μm	
Sensor size	1/1.8"	
Resolution	3072 × 2048	
Max. frame rate	60.9 fps @ 3072 × 2048 Mono 8	60.9 fps @ 3072 × 2048 Bayer RG 8
Dynamic range	66.2 dB	
SNR	41.4 dB	
Gain	0 dB to 24 dB	
Exposure time	8 μs to 1 sec	
Exposure mode	Off/Once/Continuous exposure mode, supports Rolling and Global Reset	
Mono/color	Mono	Color
Pixel format	Mono 8/10/10Packed/12/12Packed	Mono 8, Bayer RG 8/10/10Packed/12/12Packed, YUV422Packed, YUV422_YUYV_Packed, RGB 8, BGR 8
Binning	Supports 1 × 1, 2 × 2, 4 × 4	
Decimation	Supports 1 × 1, 2 × 2, 4 × 4	
Reverse image	Supports horizontal and vertical reverse image output	
Electrical features		
Data interface	USB 3.0, compatible with USB 2.0	
Data interface type	Type-C interface	
Control interface	BASE: Not supported	
Digital I/O	8-pin M8 A-Code aviation connector provides power and I/O, including opto-isolated input × 1 (Line 0), opto-isolated output × 1 (Line 1), bi-directional non-isolated I/O × 1 (Line 2).	
Power supply	9 VDC to 24 VDC, supports USB 3.0 power supply	
Power consumption	BASE: Typ. 1.5 W @ 5 VDC (USB 3.0 provides power supply)	BASE: Typ. 1.6 W @ 5 VDC (USB 3.0 provides power supply)

Mechanical	
Lens mount	C-mount
Dimension	BASE: 29 mm × 29 mm × 30 mm (1.1" × 1.1" × 1.2")
Weight	BASE: Approx. 72 g (0.2 lb.)
Ingress protection	BASE: IP40 (under proper lens installation and wiring)
Temperature	Working temperature: -30 °C to 60 °C (-22 °F to 140 °F) Storage temperature: -30 °C to 80 °C (-22 °F to 176 °F)
Humidity	20% RH to 95% RH (no condensation)
General	
Client software	MVS or third-party software meeting with USB3 Vision Protocol
Operating system	32/64-bit Windows 7/10, 64-bit Windows 11, 32/64-bit Linux
Compatibility	USB3 Vision, GenICam
Certification	CE, RoHS, KC

Dimension

BASE

