

MV-SC3016C

1.6 MP Color Vision Sensor

With built-in positioning and measurement algorithms, MV-SC3016C vision sensor can detect object's existence, quantity, location, etc. It can be monitored and operated via the SCMVS client. It can output results via RS-232 and Ethernet, and cooperate with other processes via IO. The vision sensor supports multiple result output methods and customized result text output.



Key Features

- Adopts embedded hardware platform for high-speed image processing.
- Adopts built-in positioning and measurement algorithms to detect object's existence, quantity, location, etc.
- Multiple IO interfaces for input and output signals.
- Multiple indicators for displaying device status.
- Adopts light source to ensure uniform brightness in the illuminated area.
- Supports multiple communication protocols, including RS-232, TCP, UDP, FTP, PROFINET, Modbus, and EtherNet/IP.

Available Models

- 6 mm focal length: MV-SC3016C-06M-WBN
- 12 mm focal length: MV-SC3016C-12M-WBN
- 14.8 mm focal length: MV-SC3016C-15M-WBN

Typical Application

- Consumer electronics
- Food and medical industry
- Automobile




Specification

Model	MV-SC3016C-06M-WBN	MV-SC3016C-12M-WBN	MV-SC3016C-15M-WBN
Tool			
Vision tool	<ul style="list-style-type: none"> ● Measurement: P2P measurement, P2L measurement, contrast measurement, grayscale size, edge width measurement, width measurement, brightness average value, L2L angle, color measurement, color size, diameter measurement, line angle ● Existence: Spot existence, edge existence, contour existence, pattern existence, circle existence, line existence, anomaly judge, existence detection ● Count: Spot count, edge count, contour count, pattern count, learning-based count, color count ● Recognition: Multi-object count, code recognition, color contrast, color recognition, category recognition, classification registration, object registration, OCR ● Logic: Calculator, if module, logic judge, format output, condition judge, character comparison, combination judge ● Location: Calibration convert, single point alignment, point rectify, point grasp, scale transformation, fixture ● Deep learning: DL classification, DL object detection ● Defect detection: Anomaly detection 		
Solution capacity	Supports importing and exporting solutions, up to 32 solutions can be stored.		
Communication protocol	RS-232, TCP, UDP, FTP, PROFINET, Modbus, EtherNet/IP, MELSEC/SLMP, FINS, Keyence KV		
Camera			
Sensor type	CMOS, global shutter		
Pixel size	3.45 μm × 3.45 μm		
Sensor size	1/2.9"		
Resolution	1408 × 1024		
Max. frame rate	60 fps		
Gain	0 dB to 15 dB		
Exposure time	35 μs to 1 sec		
Pixel format	RGB 8, Mono 8		
Mono/color	Color		
Electrical feature			
Data interface	Fast Ethernet (100 Mbit/s)		
Digital I/O	17-pin M12 connector provides power, Ethernet, digital I/O, and serial port: Input signal × 2 (Line 0/1), output signal × 3 (Line 5/6/7), bi-directional I/O × 3 (Line 2/3/4), and external button input × 1. Output signal can be set as NPN or PNP.		
Power supply	24 VDC		
Power consumption	Avg.: 13.8 W @ 24 VDC (light source enabled) Max.: 42 W @ 24 VDC (light source enabled)		
Mechanical			
Lens mount	M12-mount, mechanical focus supported		
Focal length	6 mm	12 mm	14.8 mm
Lens cap	Transparent lens cap by default. Half-polarized or fully-polarized lens cap is optional.		

Light source	14 LEDs, white light by default. Red, blue or IR is optional.
Indicator	Power indicator (PWR), network indicator (LNK), status indicator (STS), result indicator (OK/NG)
Dimension	65.2 mm × 65.2 mm × 47 mm (2.6" × 2.6" × 1.9")
Weight	Approx. 280 g (0.6 lb.)
Ingress protection	IP67 (under proper installation of lens and wiring)
Temperature	Working temperature: 0 °C to 50 °C (32 °F to 122 °F) Storage temperature: -30 °C to 70 °C (-22 °F to 158 °F)
Humidity	20% RH to 95% RH (no condensation)
Vibration resistance	Meets standard IEC 60068-2-6:2007. Bare device withstands 10 Hz to 55 Hz, 1.5 mm peak-to-peak amplitude, 2 hours per axis (X, Y, Z)
Shock resistance	Meets standard IEC 60068-2-27:2008. Bare device withstands 30 g / 11 ms, half-sine wave, 500 shocks per axis (6 directions)
General	
Client software	SCMVS
Certification	CE, KC

Dimension

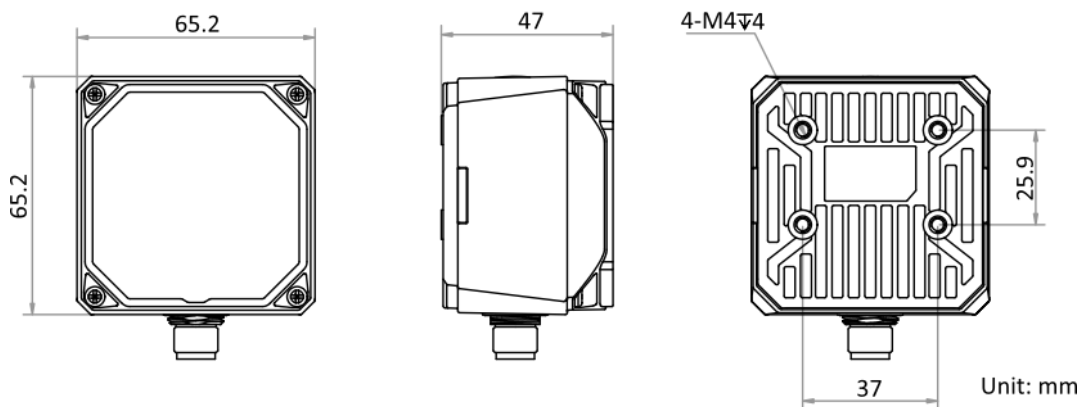

Detection Range

MV-SC3016C (Unit: mm)					
Lens Focal Length	Working Distance	Field of View		Single Pixel Accuracy	Diagram of Field of View
		H	V		
6	25	20	15	0.01	
	100	81	59	0.06	
	200	162	118	0.12	
	300	243	177	0.17	
	600	486	353	0.35	
	1000	810	589	0.58	
	2000	1619	1178	1.15	
12	60	24	18	0.02	
	100	40	29	0.03	
	200	81	59	0.06	
	300	121	88	0.09	
	600	243	177	0.17	
	1000	405	294	0.29	
	2000	810	589	0.58	
14.8	60	20	14	0.01	
	150	49	36	0.03	
	300	98	72	0.07	
	600	197	143	0.14	
	1000	328	239	0.23	
	2000	656	477	0.47	