


产品技术规格书
(Product Technical Specification)

No.	名称 (Name)	规格 (Specification)		No.	名称 (Name)	规格 (Specification)			
1	型号(Model)	AZURE-DN1616ML10M		14	视场角 F.O.V(DxVxH)	° "	1	2/3	1/2
2	物料代码(Material Code)	3. A01. 0101616L10				D	52. 38	36. 75	26. 95
3	靶面格式(Image Format)	1 "				H	42. 49	29. 59	21. 64
4	分辨率 (Resolution)	120 lp/mm				V	32. 21	22. 30	16. 27
5	焦距(Focal Length)	16mm		15	接口(Mount)		C		
6	后截距(Back Focus)	20. 83mm		16	适用物距 (Suitable Distance)		0. 35-∞m		
7	F值(F/ No.)	1. 6		17	最佳物距 (Optimum Working Distance)		1. 1m		
8	光圈(Iris Type)	Manual		18	镀膜(Coating)		400nm-950nm		
9	畸变(Distortion)	<-3. 56%		19	外形尺寸(Dimention)		Φ 53×101. 63mm		
10	通光口径 (Lens Effective Diameter)	前面(Front)	Φ 32. 69mm	20	重量(Weight)		g		
		后面(Back)	Φ 19. 82mm	21	工作温度 (Operating Temperature)		-20℃~+65℃		
11	相对照度 (Relative Illuminate)	76. 7%		22	镜头组成 (Lens Construction)		13-8		
12	光学总长(TTL)	118mm		23	最大主光线入射角 (CRA)		7. 4°		
13	设计波长(Design Wavelength)	400~850nm		24	滤镜尺寸(Filter Thread)		M40. 5×0. 5		

Size:

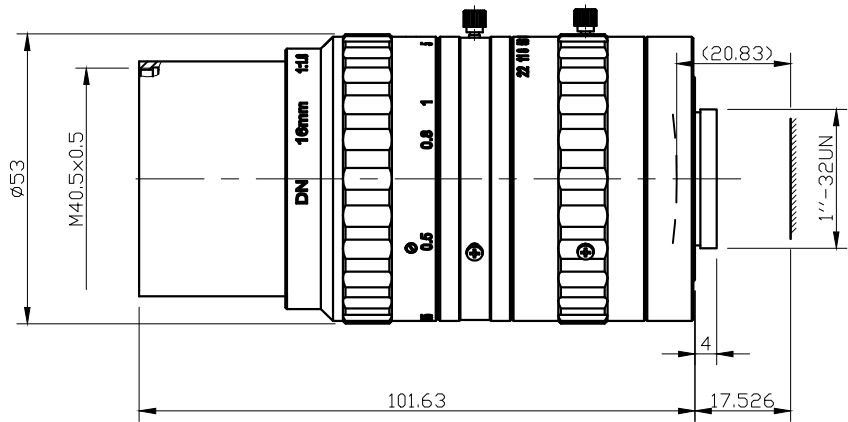

Unit:mm

Draw	Check	Recheck	Approval	福建浩蓝光电有限公司 AZURE Photonics Co.,Ltd