


产品技术规格书 (Product Technical Specification)

No.	名称 (Name)	规格 (Specification)	No.	名称 (Name)	规格 (Specification)
1	型号 (Model)	AZURE-11030HF	13	视场角 F.O.V(DxVxH)	" 43mm 4/3 1
2	物料代码 (Material Code)	3. A01. 010086-B			D 21.9 11.58 8.29
3	靶面格式 (Image Format)	43mm			H 17.67 9.29 6.64
4	分辨率 (Resolution)	3.5um			V 13.34 6.98 4.98
5	焦距 (Focal Length)	110mm	14	接口 (Mount)	F口
6	后截距 (Back Focus)	22.5mm	15	适用物距 (Suitable Distance)	184~∞mm
7	F值 (F/ No.)	3.0	16	最佳物距 (Best Distance Range)	
8	光圈 (Iris Type)	Manual	17	外形尺寸 (Dimension)	φ81x139.78mm
9	畸变 (Distortion)	<1.33%	18	重量 (Weight)	g
10	通光口径 (Lens Effective Diameter)	前面 (Front) φ37.03mm	19	工作温度 (Operating Temperature)	-20°C~+65°C
		后面 (Back) φ36.35mm	20	最大主光线入射角 (CRA)	
11	相对照度 (Relative Illuminate)	>50%	21	滤镜尺寸 (Filter Thread)	M49×0.75
12	光学总长 (TTL)	160mm	22	设计波长 (Design Wavelength)	400~700nm

Size:

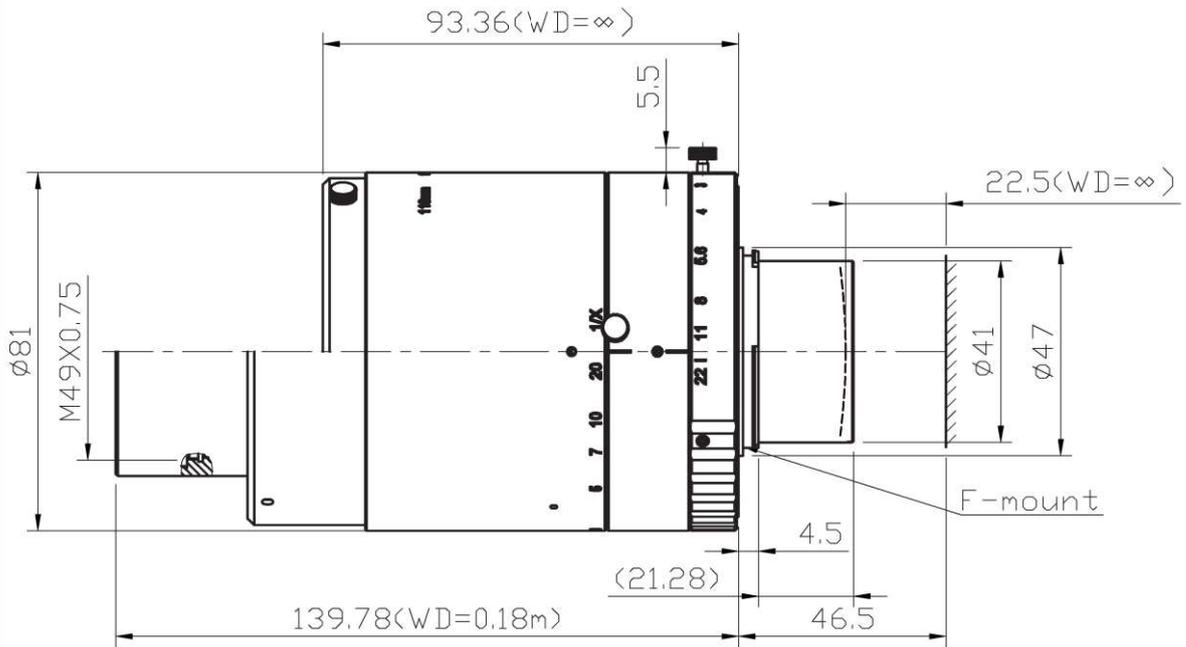

Unit:mm

Draw	Check	Recheck	Approval	福建浩蓝光电有限公司 AZURE Photonics Co.,Ltd